

# **POINT CUP**

POINT CUP office booth is a sound-friendly 360-degree furniture solution that offers a comfortable space for presentations and video conferences.



#### **TECHNICAL INFORMATION**

SOCKETS One electrical socket on the table + 3 sockets in the screen wall.

SCREEN Screen wall is suitable for 20-42" screen.

Screen wall does not include screen nor bracket for it.

ELECTRICITY CONNECTION The length of the electric cord for the POINT CUP solution is 3 m.

MATERIAL DESCRIPTION Office booth sofa modules with plywood frame, polyurethane foam and fabric upholstery.

Table with structural paint top and powder-coated steel base.


Base board painted MDF.

Screen wall painted MDF and felt from the back.

**OPTIONS** Tabletop with laminate.

MEASUREMENTS W2450 x D2350 x H1420 mm

TOP CUP table Ø900 / H720 mm

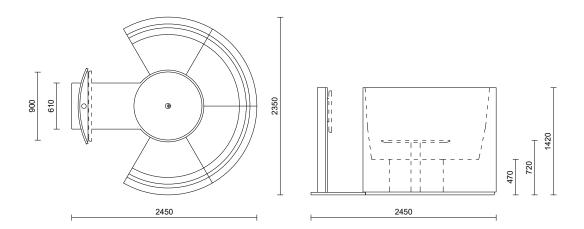



#### UPHOLSTERY FABRIC FOR POINT CUP: WOOLY FROM NEVOTEX | STANDARD PRICE, CATEGORY 1

Composition: 70% Recycled wool, 25% Polyamide, 5% Other fibers

Durability: 150 000 Martindale

Lightfastness: 6

Crocking: 4-5/wet, 5/dry

Sustainability: certified according to Global Recycled Standard (GRS), no. CU1049784GRS-2023-00050154

Cleaning: vacuuming and dry cleaning

Fire resistant: Yes





#### UPHOLSTERY FABRIC FOR POINT CUP: MAIN LINE FLAX FROM CAMIRA | STANDARD PRICE, CATEGORY 1

Composition: 70% Virgin wool, 30% Flax


Durability: 50.000 Martindale

Lightfastness: 5 Crocking: 3/wet, 4/dry

Sustainability: Complies with EU ecolabel "The Flower", Compostable

Cleaning: Vacuuming and dry cleaning

Fire resistant: Yes





#### **UPHOLSTERY FABRIC FOR POINT CUP: PYTON FROM DELFOS FR | CATEGORY 2**

Synthetic leather

Composition: 77% PVC, 23% CO

Abrasion / Martindale: dry = 51.200 /cycles, wet = 12.800 /cycles

Lightfastness: 5 Crocking: 4-5 Breathable

Fire resistant: Yes / Flame retardant, IMO Certificate









0793 Mocca 1168 Cashmere

Because of its characteristics, clean and care the material frequently, with lukewarm water and a damp cloth, preferably of micro fibre. Soiling may be treated with a mild soap and proceed next to its drying by using a hairdryer or, failing that, a drymcloth. It should be avoided that areas that have been treated for cleaning remain wet













hreathable and flame retardant quality

efficient material long-life

#### UPHOLSTERY FABRIC FOR POINT CUP: GRAIN/2288 FROM GABRIEL | PRICE CATEGORY 2

Composition: 80% post-consumer recycled polyester / 20% polyester

Durability: 100.000 Martindale

Pilling: 5

Light fastness: 5-7

0796 Negro 1112 Smoke

Cleaning: wash or dry cleaning

Fire resistant: Yes






















#### **COLOR OPTIONS FOR POINT CUP TABLE**

STANDARD PRICE, CATEGORY 1	PRICE CATEGORY 2
NCS S 0500-N Structural	White laminate
STEEL TUBE BASE   STANDARD PRICE, CATEGORY 1	
RAL 9016	

### FELT FOR CUP SCREEN HOLDER: FULDA FIT FROM FILZFABRIK | STANDARD PRICE, CATEGORY 1

Composition: 30% Polyamid, 70% Polypropylen Static electrical propensity: Antistatic Classification for use: Commercial / heavy use

Fire resistant: Yes



### SCREEN WALL COLOR | STANDARD PRICE, CATEGORY 1



Smooth

## BASEBOARD COLOR | STANDARD PRICE, CATEGORY 1



NCS S 0500-N Structural