

POD PHONE SMALL

POD PHONE SMALL is a telephone booth that improves privacy when taking phone calls in open spaces and office environments. Despite of its compact size, this telephone booth does not lose the sense of space or its visual protection. POD PHONE SMALL telephone booths are installed without changes to existing structures or walls, as well as reassembled in another location.

TECHNICAL DETAILS

Technical information

STC value 45.
Power grommet on the table
Glass wall includes the INTO stripe window taping
Fully automated electric socket, ventilation and lights with electronic motion sensor

Material description

MDF frame and fixed table with water based paint
Painted MDF door and door panels
Door handle with brushed stainless steel
Laminated acoustic safety glass windows 0.394 in
Acoustic panel on the ceiling with lightning fixture
Walls x 2 and floor coated with carpet

| | |
|----------------------|--|
| Standard carpet: | Fletco Ex-dono quartet |
| Standard POD colors: | White smooth NCS S 0500-N Light grey smooth NCS S 6000-N Dark grey smooth NCS S 7500-N |
| Standard door color: | White NCS S 0500-N |

Options

Door and door panels with American oak
Door lock
Tailored window taping

Measurements

W39.37 x D47.24 x H91.34 in
Door 3.15 x 8.66 in



Electric systems of INTO PODS are SGS certified for North-America market area.

SURFACE FINISHES FOR POD ROOMS

- Standard paint color options



NCS S 0500-N
Smooth



NCS S 6000-N
Smooth



NCS S 7500-N
Smooth

SURFACE FINISHES FOR DOOR & DOOR SIDE PANELS

CATEGORY 1



NCS S 0500-N
Smooth

CATEGORY 2



American oak

CARPETS FOR POD ROOMS: EX-DONO QUARTET FROM FLETCO

- Composition: Polyester non woven
- Static electrical propensity: Antistatic
- Impact sound reduction: 25 dB
- Classification for use: Commercial / heavy use
- Fire resistant: Yes





393300




393340



393350



Ask for more colors! contact@intoconcept.com

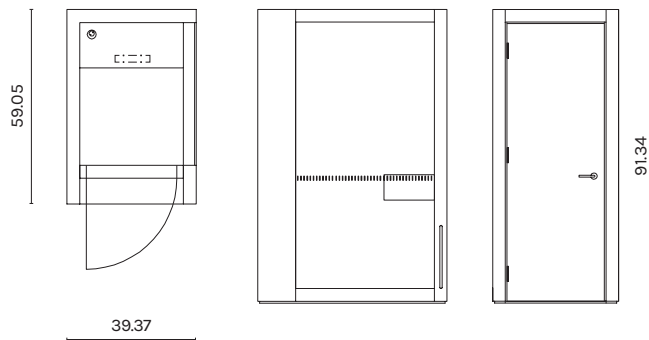

POD PHONE

POD PHONE improves privacy when taking phone calls in adaptable workspaces and office environments. Its insulating structure offers excellent acoustic protection from disruptive sounds. POD PHONE is installed without changes to existing structures or walls, as well as reassembled in another location. Lighting, electrical sockets and ventilation are included, so that POD PHONE can easily be taken into use – just plug and play.

TECHNICAL DETAILS

Technical information

STC value 45
Power grommet on the table
Glass wall includes the INTO stripe window taping
Fully automated electric socket, ventilation and lights with electronic motion sensor

Material description

MDF frame and fixed table with water based paint
Painted MDF door and door panels
Door handle with brushed stainless steel
Laminated acoustic safety glass windows 0.394 in
Acoustic panel on the ceiling with lightning fixture
Walls x 2 and floor coated with carpet

| | |
|----------------------|--|
| Standard carpet: | Fletco Ex-dono quartet |
| Standard POD colors: | White smooth NCS S 0500-N Light grey smooth NCS S 6000-N Dark grey smooth NCS S 7500-N |
| Standard door color: | White NCS S 0500-N |

Options

Door and door panels with American oak
Door lock
Tailored window taping

Measurements

W39.37 x D59.05 x H91.34 in
Door 3.15 x 8.66 in



Electric systems of INTO PODS are SGS certified for North-America market area.

SURFACE FINISHES FOR POD ROOMS

- Standard paint color options



NCS S 0500-N
Smooth



NCS S 6000-N
Smooth



NCS S 7500-N
Smooth

SURFACE FINISHES FOR DOOR & DOOR SIDE PANELS

CATEGORY 1



NCS S 0500-N
Smooth

CATEGORY 2



American oak

CARPETS FOR POD ROOMS: EX-DONO QUARTET FROM FLETCO

- Composition: Polyester non woven
- Static electrical propensity: Antistatic
- Impact sound reduction: 25 dB
- Classification for use: Commercial / heavy use
- Fire resistant: Yes





393300




393340



393350



Ask for more colors! contact@intoconcept.com

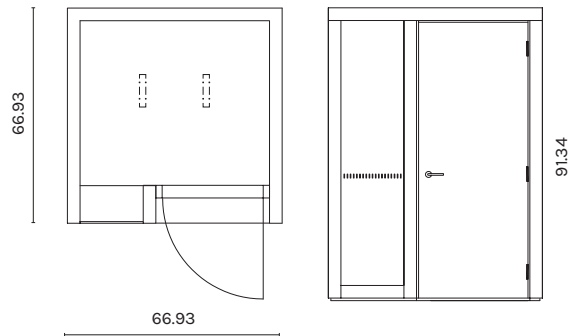

POD 1 GLASS

INTO POD 1 GLASS with glass back wall is perfect for private phone calls or as concentration workspace for one person. Even though this concentration workspace is a compact solution, its laminated sound control glass wall emits light inside and creates an airy space for visible creativity.

The POD 1 GLASS with a wider door works as a telephone booth with an unobstructed floor surface that is ideal for independent wheelchair users. In accordance with accessibility standards, a wheelchair ramp can be installed into the POD, as well as reservation for the automatic door.

TECHNICAL DETAILS

Technical information

STC value 45
POD handedness left or right
One electrical socket max. 9 A
Electrical socket position on the left, right or back wall
Electricity connection from the ceiling or floor
Glass wall includes the INTO stripe window taping
Automated electric sockets, ventilation with speed mode,
lights with electronic motion sensor and separate electronic control unit on the wall

Material description

MDF frame with water based paint
Painted MDF door and door panels
Door handle with brushed stainless steel
Laminated acoustic safety glass windows 0.394 in
Acoustic panels on the ceiling
Back wall and floor coated with carpet

Standard carpet: Fletco Ex-dono quartet

Standard POD colors: White smooth NCS S 0500-N
Light grey smooth NCS S 6000-N
Dark grey smooth NCS S 7500-N

Standard door color: White NCS S 0500-N

Options

Door and door panels with American oak
Door lock
Tailored window taping

Measurements


W66.93 x D66.93 x H91.34 in
Door 3.54 x 8.66 in



Electric systems of INTO PODS are SGS certified for North-America market area.

SURFACE FINISHES FOR POD ROOMS

- Standard paint color options

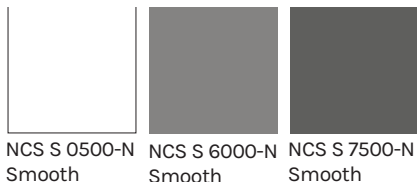


SURFACE FINISHES FOR DOOR & DOOR SIDE PANELS

CATEGORY 1





CATEGORY 2




CARPETS FOR POD ROOMS: EX-DONO QUARTET FROM FLETCO

- Composition: Polyester non woven
- Static electrical propensity: Antistatic
- Impact sound reduction: 25 dB
- Classification for use: Commercial / heavy use
- Fire resistant: Yes

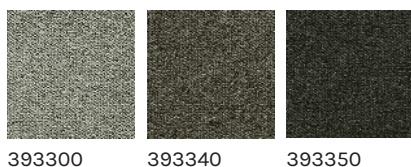

Ask for more colors! contact@intoconcept.com

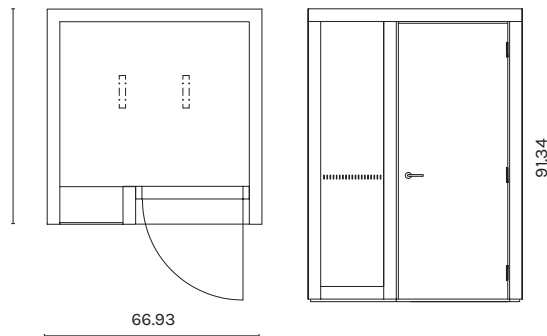

POD 1

POD 1 is perfect for small confidential meetings and as an adaptable workspace for one person. Its insulating structure offers excellent acoustic protection from disruptive sounds. The installation doesn't require changes to existing structures or walls.

TECHNICAL DETAILS

Technical information

STC value 45
POD handedness left or right
One electrical socket max. 9 A
Electrical socket position on the left, right or back wall
Electricity connection from the ceiling or floor
Glass wall includes the INTO stripe window taping
Automated electric sockets, ventilation with speed mode,
lights with electronic motion sensor and separate electronic control unit on the wall

Material description

MDF frame with water based paint
Painted MDF door and door panels
Door handle with brushed stainless steel
Laminated acoustic safety glass windows 0.394 in
Acoustic panels on the ceiling
Back wall and floor coated with carpet

| | |
|----------------------|--|
| Standard carpet: | Fletco Ex-dono quartet |
| Standard POD colors: | White smooth NCS S 0500-N Light grey smooth NCS S 6000-N Dark grey smooth NCS S 7500-N |
| Standard door color: | White NCS S 0500-N |

Options

Door and door panels with American oak
Door lock
Tailored window taping

Measurements

W66.93 x D66.93 x H91.34 in
Door 3.54 x 8.66 in



Electric systems of INTO PODS are SGS certified for North-America market area.

SURFACE FINISHES FOR POD ROOMS

- Standard paint color options



NCS S 0500-N
Smooth



NCS S 6000-N
Smooth



NCS S 7500-N
Smooth

SURFACE FINISHES FOR DOOR & DOOR SIDE PANELS

CATEGORY 1



NCS S 0500-N
Smooth

CATEGORY 2



American oak

CARPETS FOR POD ROOMS: EX-DONO QUARTET FROM FLETCO

- Composition: Polyester non woven
- Static electrical propensity: Antistatic
- Impact sound reduction: 25 dB
- Classification for use: Commercial / heavy use
- Fire resistant: Yes





393300




393340



393350



Ask for more colors! contact@intoconcept.com

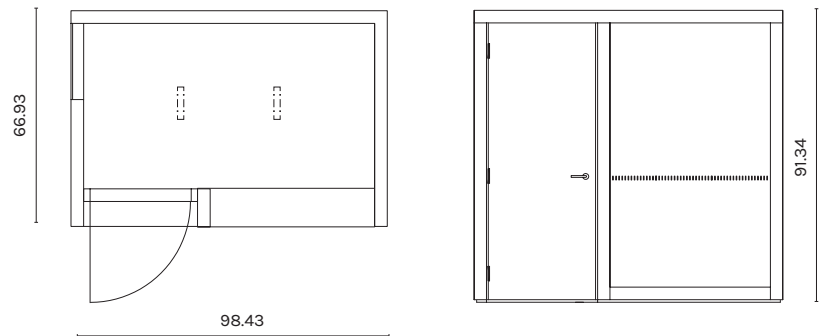

POD 2

POD 2 is perfect for small confidential meetings and as an adaptable workspace for one person. Its insulating structure offers excellent acoustic protection from disruptive sounds. The installation doesn't require changes to existing structures or walls.

TECHNICAL DETAILS

Technical information

STC value 45
 POD handedness left or right
 One electrical socket max. 9 A
 Electrical socket position on the left, right or back wall
 Electricity connection from the ceiling or floor
 Glass wall includes the INTO stripe window taping
 Automated electric sockets, ventilation with speed mode,
 lights with electronic motion sensor and separate electronic control unit on the wall

Material description

MDF frame with water based paint
 Painted MDF door and door panels
 Door handle with brushed stainless steel
 Laminated acoustic safety glass windows 0.394 in
 Acoustic panels on the ceiling
 Back wall and floor coated with carpet

Standard carpet: Fletco Ex-dono quartet

Standard POD colors: White smooth NCS S 0500-N
 Light grey smooth NCS S 6000-N
 Dark grey smooth NCS S 7500-N

Standard door color: White NCS S 0500-N

Options

Door and door panels with American oak
 Door lock
 Tailored window taping

Measurements

W98.43 x D66.93 x H91.34 in
 Door 3.54 x 8.66 in



Electric systems of INTO PODS are SGS certified for North-America market area.

SURFACE FINISHES FOR POD ROOMS

- Standard paint color options



NCS S 0500-N
Smooth



NCS S 6000-N
Smooth



NCS S 7500-N
Smooth

SURFACE FINISHES FOR DOOR & DOOR SIDE PANELS

CATEGORY 1



NCS S 0500-N
Smooth

CATEGORY 2



American oak

CARPETS FOR POD ROOMS: EX-DONO QUARTET FROM FLETCO

- Composition: Polyester non woven
- Static electrical propensity: Antistatic
- Impact sound reduction: 25 dB
- Classification for use: Commercial / heavy use
- Fire resistant: Yes





393300




393340



393350



Ask for more colors! contact@intoconcept.com

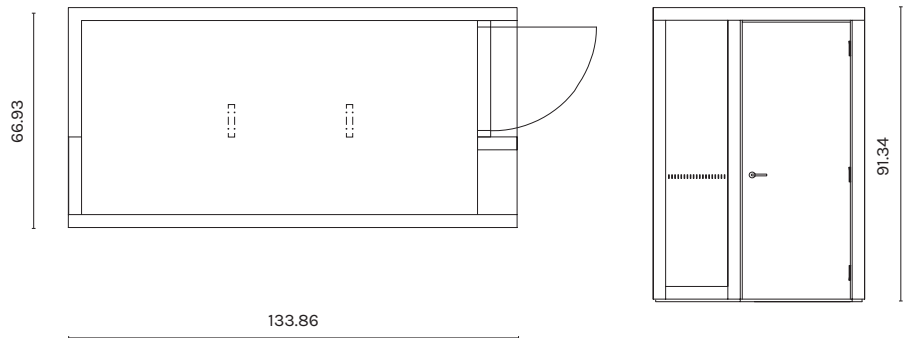

POD 3

POD 3 is perfect for small confidential meetings and video conferences. Its insulating structure offers excellent acoustic protection from disruptive sounds. The installation doesn't require changes to existing structures or walls.

TECHNICAL DETAILS

Technical information

STC value 45.
 POD handedness left or right
 Two electrical sockets max. 9 A
 Electrical socket position on the left, right or back wall
 Electricity connection from the ceiling or floor
 Glass wall includes the INTO stripe window taping
 Automated electric sockets, ventilation with speed mode,
 lights with electronic motion sensor and separate electronic control unit on the wall

Material description

MDF frame with water based paint
 Painted MDF door and door panels
 Door handle with brushed stainless steel
 Laminated acoustic safety glass windows 0.394 in
 Acoustic panels on the ceiling
 Back wall and floor coated with carpet

| | |
|----------------------|--|
| Standard carpet: | Fletco Ex-dono quartet |
| Standard POD colors: | White smooth NCS S 0500-N Light grey smooth NCS S 6000-N Dark grey smooth NCS S 7500-N |
| Standard door color: | White NCS S 0500-N |

Options

Door and door panels with American oak
 Door lock
 Tailored window taping

Measurements

W66.93 x D133.86 x H91.34 in
 Door 3.54 x 8.66 in



Electric systems of INTO PODS are SGS certified for North-America market area.

SURFACE FINISHES FOR POD ROOMS

- Standard paint color options



NCS S 0500-N
Smooth



NCS S 6000-N
Smooth



NCS S 7500-N
Smooth

SURFACE FINISHES FOR DOOR & DOOR SIDE PANELS

CATEGORY 1



NCS S 0500-N
Smooth

CATEGORY 2



American oak

CARPETS FOR POD ROOMS: EX-DONO QUARTET FROM FLETCO

- Composition: Polyester non woven
- Static electrical propensity: Antistatic
- Impact sound reduction: 25 dB
- Classification for use: Commercial / heavy use
- Fire resistant: Yes





393300




393340



393350



Ask for more colors! contact@intoconcept.com

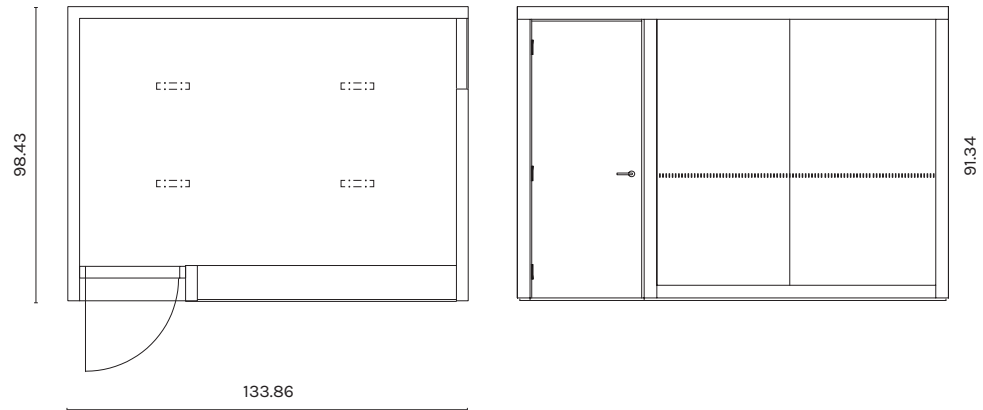

POD 4

POD 4 meeting rooms are perfect for private or confidential meetings as well as adaptable work spaces. The acoustic protection in this meeting room is excellent due to its insulating structure. The installation doesn't require changes to existing structures or walls.

TECHNICAL DETAILS

Technical information

STC value 45.
 POD handedness left or right
 Two electrical sockets max. 9 A
 Electrical socket position on the left, right or back wall
 Electricity connection from the ceiling or floor
 Glass wall includes the INTO stripe window taping
 Automated electric sockets, ventilation with speed mode,
 lights with electronic motion sensor and separate electronic control unit on the wall

Material description

MDF frame with water based paint
 Painted MDF door and door panels
 Door handle with brushed stainless steel
 Laminated acoustic safety glass windows 0.394 in
 Acoustic panels on the ceiling
 Back wall and floor coated with carpet

Standard carpet: Fletco Ex-dono quartet

Standard POD colors: White smooth NCS S 0500-N
 Light grey smooth NCS S 6000-N
 Dark grey smooth NCS S 7500-N

Standard door color: White NCS S 0500-N

Options

Door and door panels with American oak
 Door lock
 Tailored window taping

Measurements

W133.86 x D98.43 x H91.34 in
 Door 3.54 x 8.66 in



Electric systems of INTO PODS are SGS certified for North-America market area.

SURFACE FINISHES FOR POD ROOMS

- Standard paint color options



NCS S 0500-N
Smooth



NCS S 6000-N
Smooth



NCS S 7500-N
Smooth

SURFACE FINISHES FOR DOOR & DOOR SIDE PANELS

CATEGORY 1



NCS S 0500-N
Smooth

CATEGORY 2



American oak

CARPETS FOR POD ROOMS: EX-DONO QUARTET FROM FLETCO

- Composition: Polyester non woven
- Static electrical propensity: Antistatic
- Impact sound reduction: 25 dB
- Classification for use: Commercial / heavy use
- Fire resistant: Yes





393300



393340



393350



Ask for more colors! contact@intoconcept.com